

TURBOVAC AUTOMATIC PACKAGING LINE

FOR CONTINUOUS OPERATION

- After the machine is manually loaded, the cover closes automatically and the vacuum cycle starts.
- After the vacuum cycle the cover automatically swings to the other working platform while the packaged products are automatically discharged on the conveyor belt and are transported into the immersion tank which automatically starts the short immersion cycle.
- After the immersion the product is discharged on the exit table.
- For regular vacuum bags the immersion tank is not necessary.



Standard

- Rugged all stainless steel construction
- IP65 splash water proof controls
- Pneumatic automatic movement of the vacuum chamber
- Manual, semi-automatic or automatic operation
- Sensor controlled 10 program digital vacuum control unit
- External pump connection
- Special cleaning position
- Conveyor belt automatic controlled by the movement of the vacuum chamber and the immersion tank
- Immersion tank has automatic water level and temperature control
- The immersion rack can be removed to clean the immersion tank

Automatic Packaging Line

- 1 Automatic double chamber vacuum machine
- 2 Conveyor
- 3 Immersion tank
- 4 Exit table

Optional

- CCC for shrink bags or 2S
- Gas flush
- Additional 300m³ external pump

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курган (3522)50-90-47
Курск (4712)77-13-04
Липецк (4742)52-20-81

По вопросам продаж и поддержки обращайтесь:

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Ноябрьск (3496)41-32-12
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саранск (8342)22-96-24
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Улан-Удэ (3012)59-97-51
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

SPECIFICATIONS A5000

AUTOMATIC DOUBLE CHAMBER VACUUM MACHINE								
	SEAL LENGTH	WORK HEIGHT	USEFUL CHAMBER SIZE (wxdxh)	OUTSIDE DIMENSION (wxdxh)	WEIGHT	STANDARD VOLTAGE*	POWER CONSUMPTION	AIR PRESSURE
A5000 L	2 x 810	910	810 x 680 x 200	2020 x 923 x 1230	525 kg	400-3-50 Hz	5,5 kW	6 bar-100 Ltr p/m
A5000 LL	4 x 810	910	810 x 680 x 200	2020 x 923 x 1230	525 kg	400-3-50 Hz	5,5 kW	6 bar-100 Ltr p/m
CONVEYOR BELT								
	LENGTH	WIDTH	HEIGHT	DIMENSIONS (lxwxh)	WEIGHT	STANDARD VOLTAGE*	POWER CONSUMPTION	
CS-HV	2900	630	910	2900 x 630 x 910	160 kg	220-1-50 Hz	800 W	
IMMERSION TANK								
	WATER CONTENT	IMMERSION PLATFORM	IMMERSION DEPTH	DIMENSIONS (wxdxh)	WEIGHT	STANDARD VOLTAGE*	POWER CONSUMPTION	
ADT-HV 60/80	175 Ltr	800 x 560	250	954 x 920 x 1698	255 kg	400-3-50 Hz	18 Kw option 30 Kw	
EXIT TABLE								
	DIMENSIONS (lxwxh)							
EXIT TABLE	1265 x 630 x 850							


Dimensions in mm *Machines can be supplied with all worldwide voltages applicable

OPTIONS A5000

	DIGITAL TIME CONTROL	SENSOR CONTROL	SEAL	SEAL CONFIGURATION	GAS	PUMP CAPACITY M³	CYCLE TIME
A5000 L	10 programs	sensor/H ₂ O	Double/CC/CCC/2S**	L&L	gas	1 or 2 x 300 m³	30 sec
A5000 LL	10 programs	sensor/H ₂ O	Double/CC/CCC/2S	2x L&L	gas	1 or 2 x 300 m³	30 sec

** CC = Clean Cut, CCC = Clean Cut Controlled, 2S = Two Sides

SEAL CONFIGURATIONS A5000

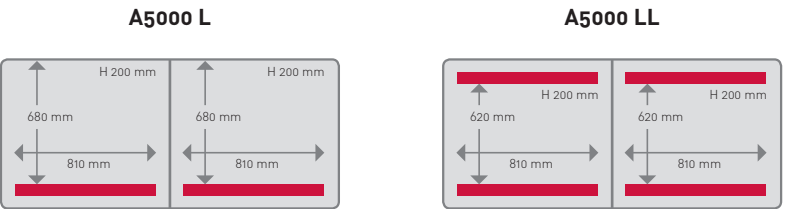

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

tav@nt-rt.ru || <https://turbovac.nt-rt.ru>